


SCANIA INDUSTRIAL ENGINE: EU STAGE V

# 16-LITRE ENGINE

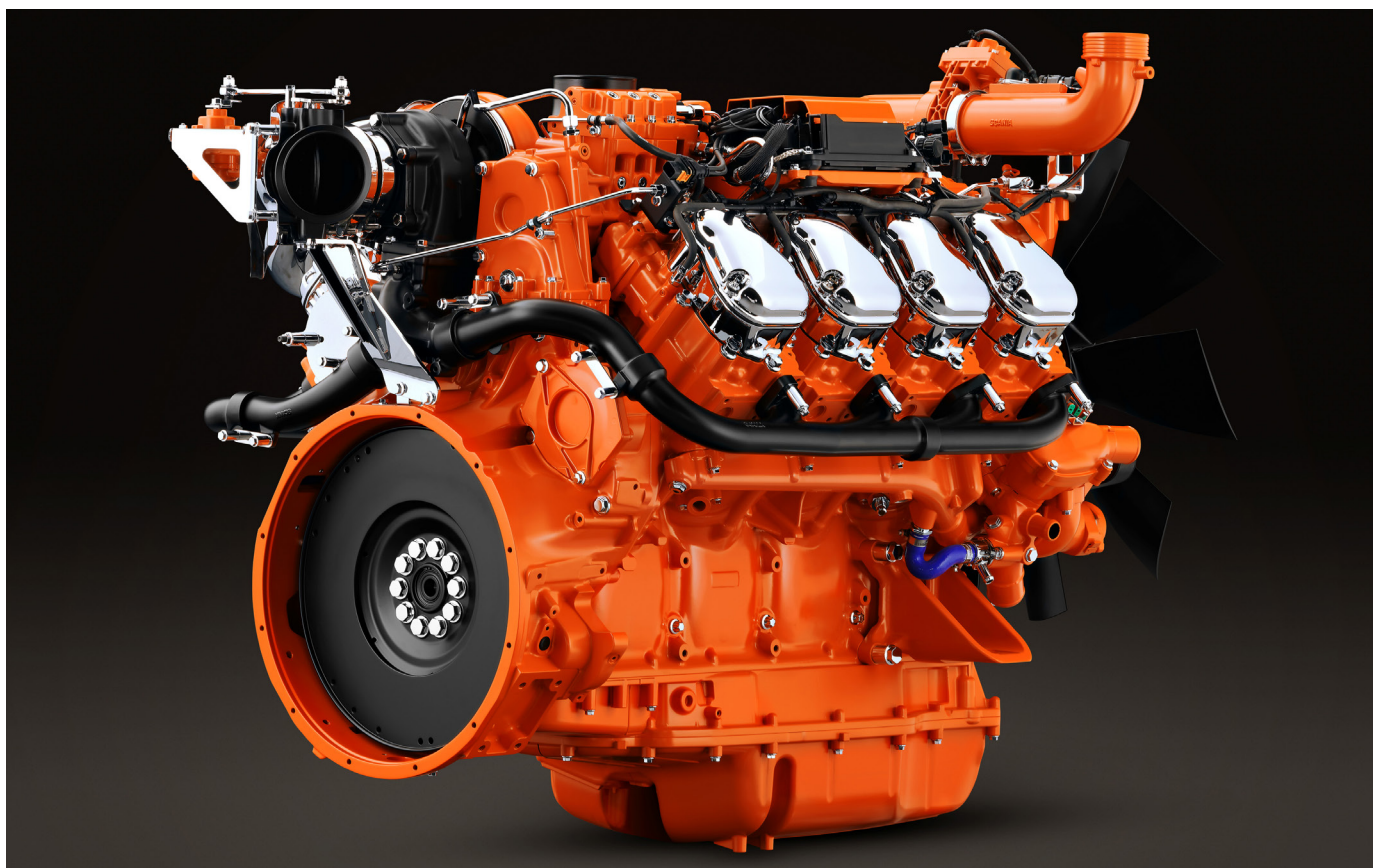

## Engine description

DC16 314A. 522 kW

Engine speed	1,900 rpm
Emission compliance	EU Stage V
Rating	IFN
No of cylinders	90° V8
Working principle	4-stroke
Displacement	16.4 litres
Weight	1,361 kg (excluding oil and coolant)
Oil capacity	40-48 litres (standard oil sump)
Electrical system	1-pole 24 V DC

Scania's industrial engines for emission level EU Stage V are based on a robust design for superior operating economy and reliability. With their modular design, the engines offer easy installation for the producer of the equipment as well as easy access to daily checks and service for the operator. The engines can be fitted with many accessories such as air cleaners, PTOs, exhaust fittings and flywheels, to suit a variety of installations.

Scania's EU Stage V engines are equipped with a Scania developed extra high pressure fuel injection system based on common rail technology, and a turbocharger optimized for operation in combination with the exhaust gas aftertreatment system. Together with Scania's Engine Management System, the result is an engine that fulfils the strictest exhaust emission requirements, with low fuel consumption and a high torque.


### Standard equipment

- Scania Engine Management System, EMS
- Extra high pressure fuel injection system, XPI
- Waste-gate controlled turbocharger
- Saver ring in cylinder liner
- Fuel filter and extra pre-filter with water separator
- Oil filter, full flow
- Centrifugal oil cleaner
- Oil cooler, integrated in cylinder block
- Oil filler, in valve cover
- Deep front oil sump
- Oil dipstick, in cylinder block
- Magnetic drain plug for oil draining
- Starter motor, 1-pole 7.0 kW
- Alternator, 1-pole 100 A
- Flywheel, for use with friction clutch
- Silumin flywheel housing, SAE 1 flange
- Front-mounted engine suspension
- Particulate filters and SCR in compact exhaust gas aftertreatment system
- Open crankcase ventilation


**IFN - Intermittent service:** Rated output available for 1 h/6 h period. Unlimited h/year service time at a load factor of 80%.

# Power charts


Power

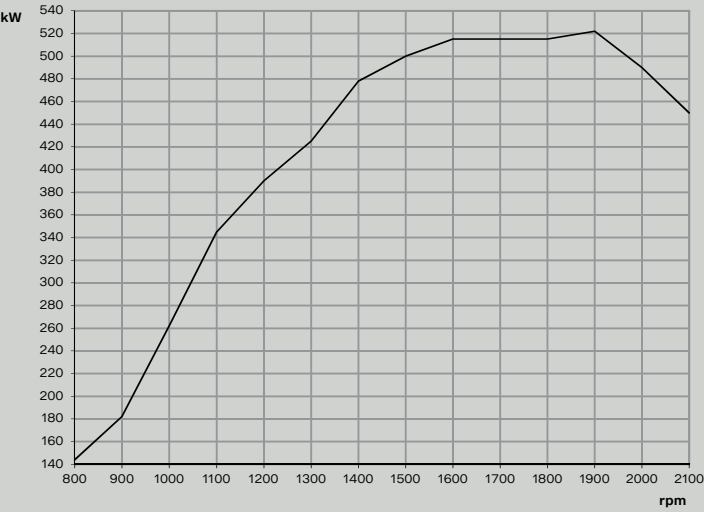


Torque

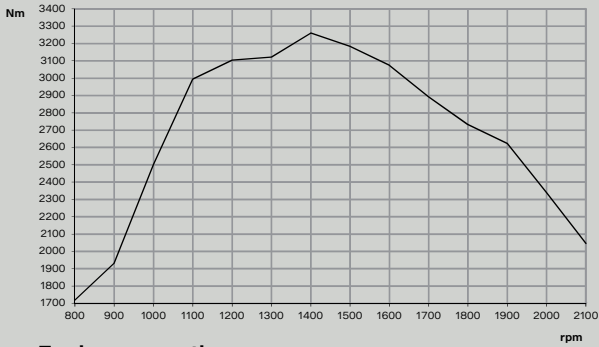

Fuel consumption

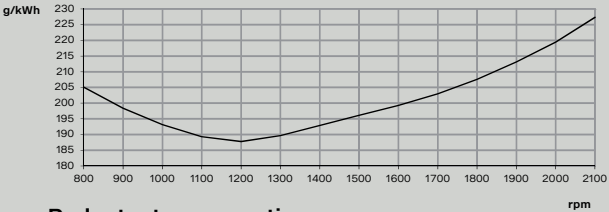


Reductant consumption

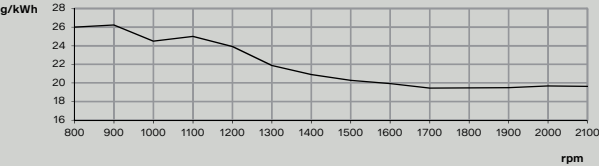

**Test conditions.** Air temperature +25 °C. Barometric pressure 100 kPa (750 mmHg). Humidity 30%. Diesel fuel acc.to ECE R 24 Annex 6. Density of fuel 0,840 kg/dm<sup>3</sup>. Viscosity of fuel 3.0 cSt at 40 °C. Energy value 42,700 kJ/kg. **Power test code** ISO 3046. Power and fuel values +/-3%.

# Dimensions

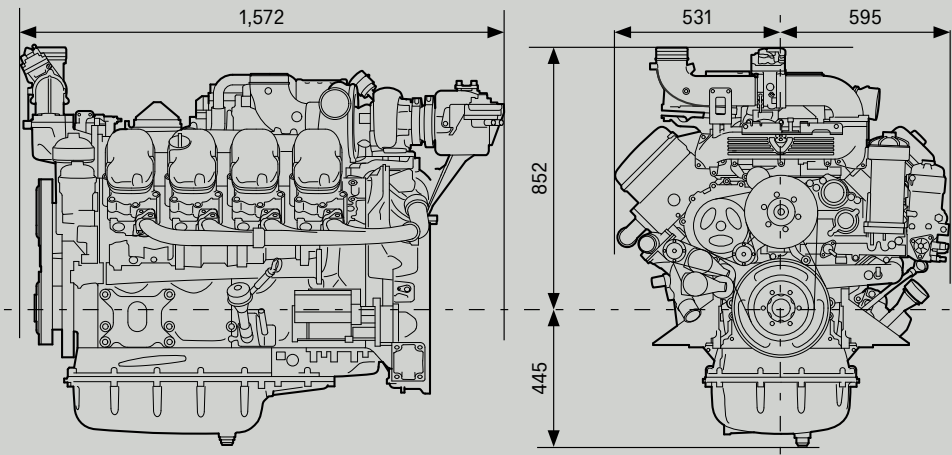


All dimensions indicated in mm.

# Technical data

	Engine speed (rpm)				
	1,200	1,500	1,800	1,900	2,100
Gross power (kW)	390	500	515	522	450
Gross power (hp, metric)	530	680	700	710	612
Gross torque (Nm)	3,104	3,183	2,732	2,624	2,046
Fuel consumption at full load (g/kWh)	188	196	208	213	227
Reductant consumption at full load (g/kWh)	24	20	19	20	20
Heat rejection to coolant (kW)	143	170	192	203	202

EMISSION COMPLIANCE EU STAGE V

# EXHAUST GAS AFTERTREATMENT SYSTEM

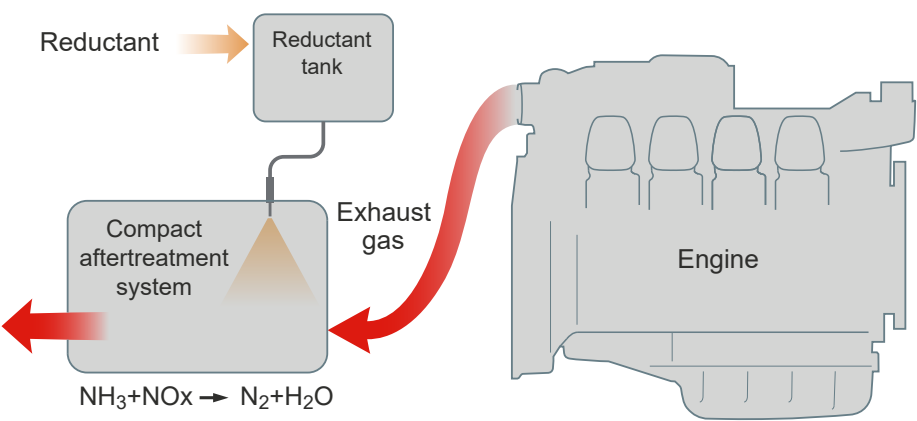


The emissions of particulate matter are filtered through a ceramic structure, that only allows particles smaller than a defined size to pass. When the filter is filled with soot particles to a specific amount, it is regenerated automatically.

SCR technology: A chemical process is started when reductant, a urea and water mixture, is injected into the exhaust gas stream. During injection, the water evaporates, and the urea breaks down to form ammonia. The ammonia then reacts with the nitrogen oxide gases in the catalytic converter and forms harmless products such as nitrogen gas and water.

SCR (Selective Catalytic Reduction) technology, in combination with particulate filters and an oxidation catalytic converter (integrated in the compact aftertreatment system), is used on Scania's EU Stage V engines to reduce the NOx and particle content in the exhaust gases in the best possible way.

## Mechanical system


	Standard	Optional
1 Exhaust brake	√	-
2 NOx flange upstream	√	-
3 Exhaust bellows	-	√
4 Exhaust flange	-	Ø130 mm, 155 mm
5 Exhaust bellows SCR	-	√
6 Compact aftertreatment system	√	-
7 NOx flange downstream	Ø127 mm, V-clamp	Ø130 mm, 155 mm
8 Reductant pressure hose	2.5 m	4 m, 5 m, 6.5 m
9 Reductant return hose	2.5 m	4 m, 5 m, 6.5 m
10 Reductant tank	38 l	45 l, 60 l, 63 l, 70 l
11 Reductant tank bleed hose	0.8 m	3.3 m
12 Coolant hose for heating of tank and pump	-	-
13 Coolant return hose	-	-

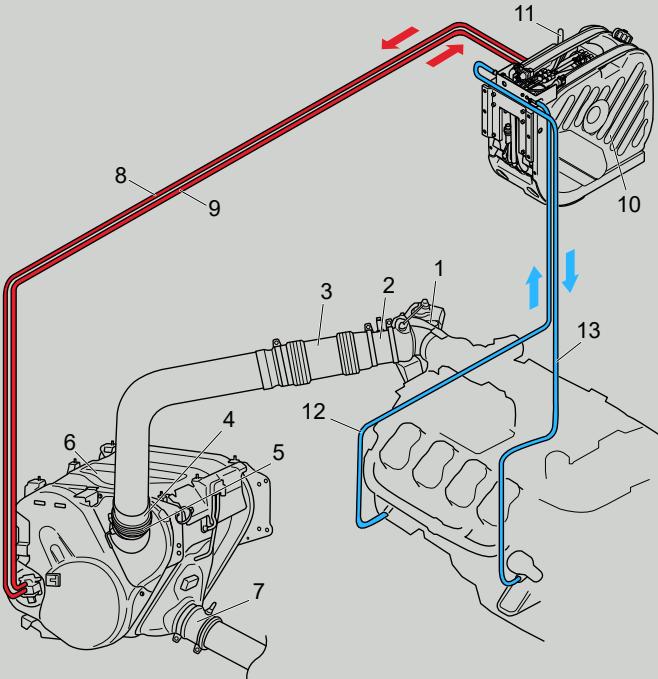

# Electrical system


- 1 NOx sensor upstream with control unit
- 2 Exhaust gas temperature sensors
- 3 Differential pressure sensor
- 4 Exhaust gas temperature sensor
- 5 Reductant doser
- 6 NOx sensor downstream with control unit
- 7 Electrical interface to exhaust gas aftertreatment system

All components are standard equipment. Standard cable length 3.0 m, optional 4.5 m, 6 m (9 m)

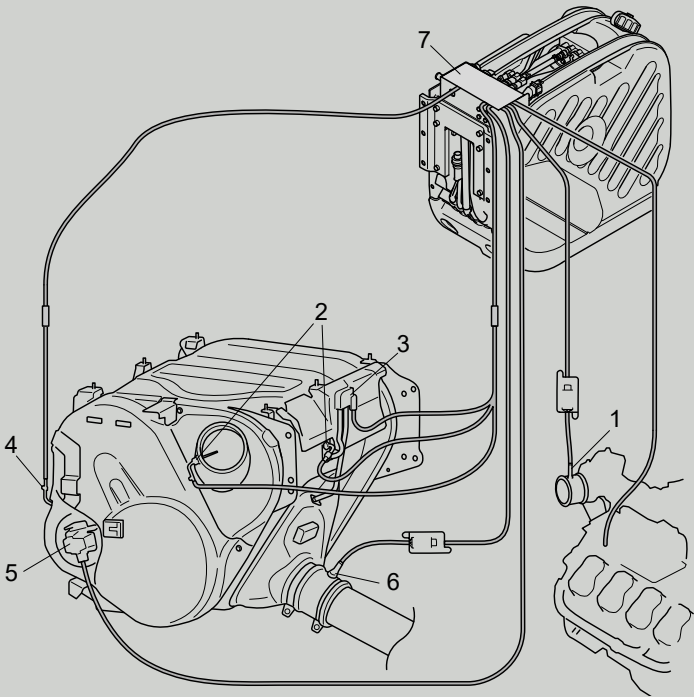

# Compact aftertreatment system

Weight: 175 kg

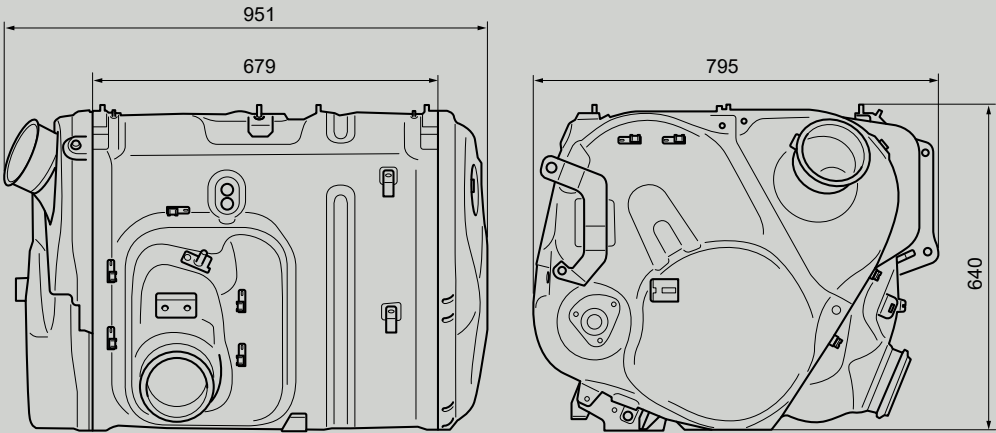

# Reductant tank, 38 litres

Available sizes	Total volume	Filling volume
38 litres	50 litres	38 litres
45 litres	60 litres	45 litres
60 litres	75 litres	60 litres
63 litres	80 litres	63 litres
70 litres	90 litres	70 litres

