

# DC13 071A. 325-371 kW (366-411 kVA)

EU Stage IIIA, China Phase III and CPCB-II



The power generation engines from Scania are based on a robust design with a strength-optimized cylinder block containing wet cylinder liners, which can easily be exchanged. Individual cylinder heads with 4 valves per cylinder promotes reparability and fuel economy.

The engine is equipped with a Scania-developed Engine Management System, EMS, to ensure control of all aspects related to engine performance. The injection system is based on electronically controlled unit injectors, which gives low exhaust emissions with good fuel economy and a high torque.

For further reduction of NOx emissions, the engines are also equipped with an exhaust gas recirculation (EGR) system, developed by Scania. The engine can be fitted with many options such as air cleaners, PTOs and cooling package, to suit a variety of installations.

|                                       | Engine speed (rpm) |                  |
|---------------------------------------|--------------------|------------------|
|                                       | 1500 rpm (50 Hz)   | 1800 rpm (60 Hz) |
|                                       | PRP                | PRP              |
| Gross power (kW)                      | 325                | 371              |
| Gross power (kVA)                     | 366                | 411              |
| Fuel consumption at full load (g/kWh) | 204                | 208              |
| Fuel consumption at 3/4 load (g/kWh)  | 204                | 211              |
| Fuel consumption at 1/2 load (g/kWh)  | 206                | 215              |
| Heat rejection to cooling water (kW)  | 138                | 151              |

**PRP – Prime power:** For continuous operation at varying load. Max. mean load factor of 70% of rated power over 24 h of operation. 1 hour/12 hour period above 100% load. Max. 25 h accumulated service time above 100% load per year.

## Standard equipment

- Scania Engine Management System, EMS
- Unit injectors, PDE
- Turbocharger
- Fuel filter and extra pre-filter with water separator
- Oil filter, full flow
- Centrifugal oil cleaner
- Oil cooler, integrated in cylinder block
- Oil filler, in valve cover
- Deep front oil sump
- Oil dipstick, in cylinder block
- Magnetic drain plug for oil draining
- Starter motor, 1-pole 6.0 kW
- Alternator, 1-pole 100 A
- Flywheel, SAE 14
- Silumin flywheel housing, SAE 1 flange
- Front-mounted engine suspension
- EGR system
- Open crankcase ventilation

## Optional equipment

- Cooling package
- Fans
- Cast iron flywheel housing
- Side-mounted PTO
- Exhaust connections
- Engine heater
- Stiff rubber engine suspension
- Air cleaner
- Closed crankcase ventilation
- Studs in flywheel housing
- Coolant level sensor
- Fine tune potentiometer
- Ramp start delay
- Ramp-up rate





## DC13 071A. 325-371 kW (366-411 kVA)

EU Stage IIIA, China Phase III and CPCB-II

### Engine description

|                          |   |
|--------------------------|---|
| No of cylinders          | 6 in-line   |
| Working principle        | 4-stroke  |
| Firing order             | 1 - 5 - 3 - 6 - 2 - 4                                   |
| Displacement             | 12.7 litres   |
| Bore x stroke            | 130 x 160 mm  |
| Compression ratio        | 17.3:1  |
| Weight                   | 1050 kg (excl oil and coolant)                          |
| Piston speed at 1500 rpm | 8.0 m/s   |
| Piston speed at 1800 rpm | 9.6 m/s   |
| Camshaft                 | High position alloy steel                               |
| Pistons                  | Steel pistons   |
| Connection rods          | I-section press forgings of alloy steel                 |
| Crankshaft               | Alloy steel with hardened and polished bearing surfaces |
| Oil capacity             | 30-36 dm <sup>3</sup> (standard oil sump)               |
| Electrical system        | 1-pole 24 V DC  |

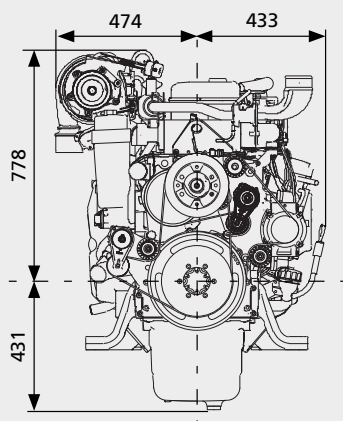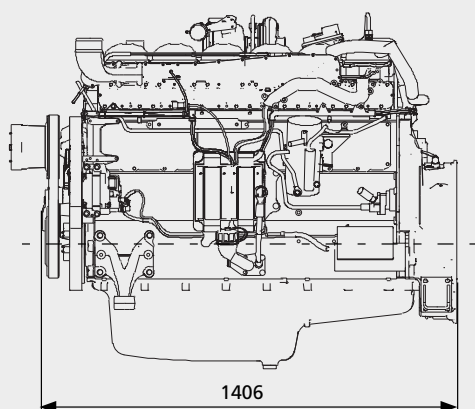

All dimensions in mm



# SCANIA

SE 151 87 Södertälje, Sweden  
Telephone +46 8 553 810 00  
[www.scania.com](http://www.scania.com)  
[powersolutions@scania.com](mailto:powersolutions@scania.com)