



P-SERIES



The Scania P-series cab provides a combination of space and security, with easy cab access ideal multi-drop duties. No wonder it's the driver's choice.

Backed by the latest and cleanest Euro SCR technology, Scania's P-series local distribution Prime Mover has the power and economy you need, day-in, day-out.

P 250/310

4X2 PRIME MOVER

Chassis Specification

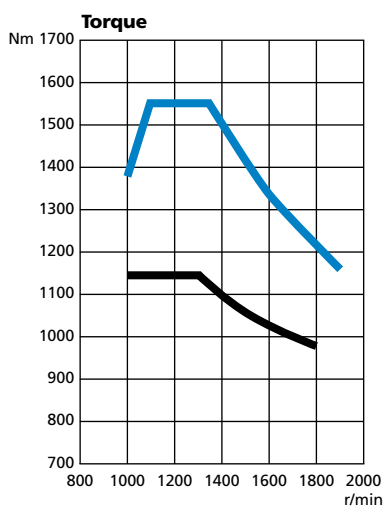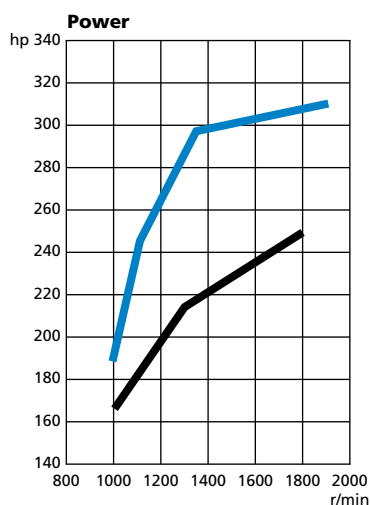

— P 310
— P 250

Engines

310

- Scania DC9 310 9 Litre In-line 5 cylinder
- Power - 310hp (228kW) @ 1900rpm
- Torque - 1550Nm (1143ft/lb) @ 1000 - 1350rpm
- Euro5 (ADR 80/03)

250

- Scania DC9 250 9 Litre In-line 5 cylinder
- Power - 250hp (184kW) @ 1900rpm
- Torque - 1150Nm (850ft/lb) @ 1000 - 1300rpm
- Euro5 (ADR 80/03)

Engine Features

- Scania electronic fuel injection
- Single stage turbocharger
- SCR with catalytic converter
- Centrifugal engine oil filter
- Spin-on turbocharger oil filter
- Cartridge style fuel filter

Fan

- 8 Blade, electronically controlled viscous drive

Alternator

- Scania 24V, 100amp

Compressor

- Knorr 720, twin cylinder, 800L/min with air drier

Air Cleaner

- Mounted under the grille R/H side

Gearbox

- Scania GRS895R, Direct drive 12 speed GRS895R
- Scania Retarder

Gearbox Features

- Scania Fully Automated Opticruise
- PTO - Electrical Preparation
- R4100D retarder

Front & Rear Axles

Front Axle

- Scania AM 740

Front Suspension

- 2 x 32 parabolic front springs 7100kg capacity with anti roll bar

Rear Axle - Driven

- Scania ADA 1100 Axle housing
- Scania R780 Differential
- Ratio 2.71 with differential lock

Rear Suspension

- Scania 2 bag air suspension (11500kg capacity)

Brakes


- Scania electronically controlled disc brakes
- EBS with integrated ABS and Traction Control
- Hill hold

Wheels

- Steel disc wheels painted silver
- 22.5" x 8.25" Tubeless rims
- 335mm PCD

Tyres

- Front - Bridgestone 295/80 R22.5
- Rear - Bridgestone 295/80 R22.5

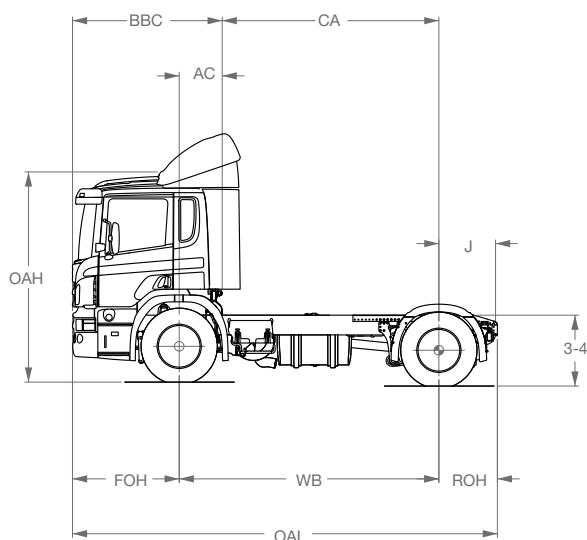

FOH	1455mm	AC	588mm
WB	3550mm	3-4	997-976mm
ROH	800mm	OAL	5805mm
BBC	2043mm	J	800mm
CA	2962mm	OAH	2810mm

Tare Weight: Front = 4770kg, Rear = 1840kg,
Total = 6610kg

Tare weight includes, tanks full of fuel.
It does not include turntable, bull bar or driver.

Weight tolerance +/- 5%

Chassis

Frame

- Scania F950, 270 x 90 x 9.5mm
- Width 770mm

Paint

- Scania Sub-Grey (Powder Coat)

Axle Distance

- 3550mm
- Rear overhang 800mm

Fuel Tanks

- 1x400L R/H
- 1x75L Urea tank R/H

Front Bumper

- High Mounted FUP compliant bumper
- FUP to ECE R93

Batteries

- 24V (2x12V, 180amp) L/H Side
- Chassis electrical connection for auxiliary equipment (Max 200amps)

Trailer Connections - Brakes

- Trailer Supply & Emergency suzi coils

Trailer Connections - Electrical

- 12V & 24V trailer light outlets (ISO 1185)
- Trailer lead 7pole to 7pole
- 24V trailer 7pin ABS outlet
- Scania Body Work System with Cable Harness
- Front Mudguards with Spray suppression
- Rear Mudguards with Spray suppression

Cabin

- Scania CP16 Day Cab with four point spring suspension
- Cab Strength to ECE R29

Paint

- Cabin painted Scania white
- With Grey grille

Exterior Equipment

- Aerodynamic main & spotter mirrors electrically heated
- Electrically adjustable main mirrors
- Close up mirror on passenger side
- Roof rails with full air foil kit
- Roof mounted air horns
- Manual central locking
- Reverse alarm

Lighting

- H7 headlights
- End outline marker – White LED
- Identification lamp – Amber LED
- Boarding step lights
- Turntable light

Safety

- Driver seat belt pretensioner
- Driver's air bag

Interior Equipment

- Medium driver's seat
- Folding passenger seat
- Black woven trim
- Cruise control and dash display controlled from the steering wheel
- Scania colour dash display featuring rear axle load, hour meter and information
- AM/FM radio, CD player, Bluetooth
- AUX MP3, input
- Phone electrical preparation.
- 12V outlet in dash
- FMS Preparation
- Resettable circuit breakers
- Power windows
- Manual climate control with air conditioning
- Protective rubber floor mats
- UHF CB radio

Additional Equipment

- 20m tyre inflation hose
- Jack & wheel brace
- Globe kit
- Drivers manual
- Three safety triangles

Notes



SCANIA
Total Transport Solutions
scania.com.au

HEAD OFFICE

212 – 216
Northbourne Rd
Campbellfield, 3061
Tel: (03) 9217 3300

VICTORIA

Scania Campbellfield
212 – 216 Northbourne Rd
Campbellfield, 3061
Tel: (03) 9217 3300

Scania Dandenong

2/66 Greens Rd
Dandenong South, 3175
Tel: (03) 9217 3600

Scania Laverton

125 – 129 Boundary Rd
Laverton, 3026
Tel: (03) 9369 8666

NEW SOUTH WALES

Scania Prestons
16 – 18 Lyn Pde
Prestons, 2170
Tel: (02) 9825 7900

Scania Newcastle

1 Enterprise Drive
Beresfield, 2322
Tel: (02) 9825 7940

K & J Trucks Pty Ltd

Lot 1 Pacific Highway
Boambee, 2450
Tel: (02) 6652 7218

NJ's of Wagga

301 Copland Street
Wagga Wagga, 2650
Tel: (02) 6971 7214

QUEENSLAND

Scania Richlands
149 Archerfield Rd
Richlands, 4077
Tel: (07) 3712 8500

Scania Pinkenba

213 Holt St
Pinkenba, 4008
Tel: (07) 3712 7900

SOUTH AUSTRALIA

Scania Wingfield
218 – 234 Cormack Rd
Wingfield, 5010
Tel: (08) 8406 0200

WESTERN AUSTRALIA

Scania Kewdale
527 – 529 Abernethy Rd
Kewdale, 6105
Tel: (08) 9360 8500

Scania Bunbury

12 Proffitt St
Davenport, 6230
Tel: (08) 9724 6200